

CONFERENCE SYSTEM

C-869C

Chairman Conference Unit with Built-in Speakers

Wired chairman microphone with twin hi-fi speakers, chairman priority, stereo aux and volume control — host-powered T-connection



The C-869C is the chairman unit of the built-in-speaker conference system. Twin hi-fi speakers reproduce speech locally, and chairman priority can shut off speaking delegate units for full control of the meeting. A capacitance capsule, indicator-lamp speak button and two 3.5 mm stereo sockets (aux / earphone) round out the unit, which connects host-powered via T-connection.

Built-in
2 SPEAKERS

Priority
CHAIRMAN

24V
HOST

3.5mm
STEREO x2

Volume
CONTROL

410mm
GOOSENECK

T-Connect
WIRING

KEY FEATURES

- ✓ **Chairman Priority** — can shut off speaking delegate units; place anywhere in the loop
- ✓ **Twin Built-in Hi-Fi Speakers** — local speech reproduction at each seat
- ✓ **Stereo Aux I/O** — two 3.5 mm sockets for speech input / earphone, with volume control
- ✓ **Indicator-Lamp Speak Button** — clear speaking-state indication
- ✓ **Metal Base + Plastic Cover** — durable desktop build
- ✓ **T-Connection Wiring** — 2 m unit + 2 m T-cable for fast, tidy installation


INSTALLATION NOTES

- Connect units by T-connection using the supplied 2 m cables.
- The host supplies 24V — no local power needed.
- Place the chairman unit anywhere in the loop; priority is unrestricted.


TECHNICAL SPECIFICATIONS

Model	C-869C	Role	Chairman (built-in speaker)
Speakers	twin hi-fi built-in	Capsule	Capacitance, unidirectional
Frequency Response	40 Hz – 16 kHz	Sensitivity	-43±2 dB @1 kHz
Power	DC 24V (host)	Min Input Impedance	1 kΩ
SNR	68 dB(A)	Aux	2× 3.5 mm stereo + vol
Connector	8P terminal	Cable	2 m 8P shielded
Gooseneck	410 mm	Dimensions	188 × 136 × 60 mm
Weight	1.1 kg	Certifications	CE, 3C
Warranty	24 Months		

SYSTEM CONNECTION DIAGRAM

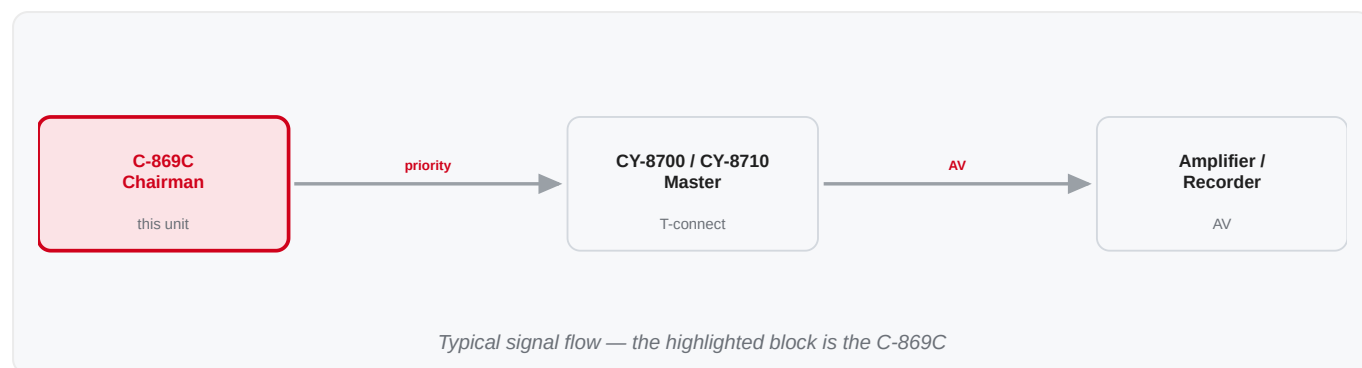

TYPICAL APPLICATION SCENARIOS

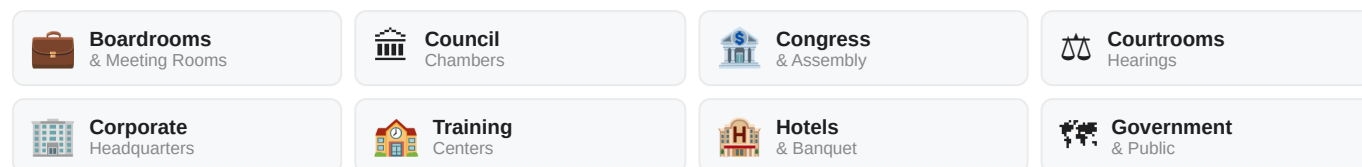

WHY C-YARK



COMPATIBLE WITH

Connects to the CY-8700 (discussion) or CY-8710 (camera-tracking) master with C-869D delegate units via T-connection.

ORDERING & SUPPORT

Model: C-869C
Lead time & MOQ: contact distributor
Distributor (Bangladesh): DIGI-MARK SOLUTION
 Specifications subject to continuous improvement.