

NEXA DOOR SERIES

NX-VD570-W

Outdoor Door Station


TIER 5 PRO

**2 MP**CAMERA
RESOLUTION**148°**VIEW
ANGLE**IP65**WEATHER
PROTECTION**-40...+50**°C OPERATING
RANGE

01 OVERVIEW

Slim aluminium outdoor door station with a 2 MP wide-angle camera, IR-cut night vision and IP65 sealing. Rated from -40 °C to +50 °C and supplied with a rain cover and a 35° deviator for angled gate posts.

02 WHERE IT FITS

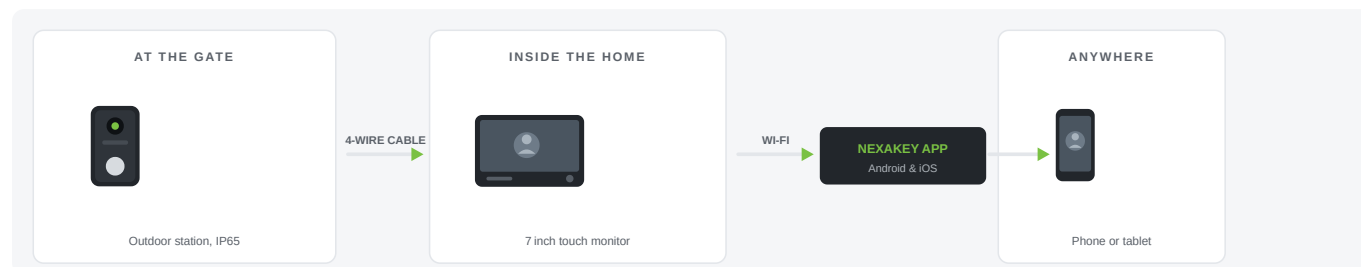

03 KEY FEATURES

01 148° wide-angle lens

3.2 mm lens with a 148° field of view, so the whole doorway including anyone standing off to the side is in frame.

03 IP65 and -40 °C to +50 °C

Aluminium alloy housing rated for the full year outdoors, with the supplied rain cover fitted.

05 Switchable video output

Signal switches between 1080P, 720P and CVBS to match whichever monitor or recorder it is wired to.

02 IR-cut night vision

Mechanical IR-cut filter plus infrared illumination, so colour by day and a readable face after dark.

04 Exit button and lock output

Drives common electronic locks directly and accepts an exit button for the inside of the door.

06 Rain cover and 35° deviator included

The deviator angles the station towards the approach when it has to be mounted on a pillar or a recessed jamb.

04 TYPICAL APPLICATIONS

Main Gates

Apartment Entrances

Office Reception Doors

Factory Side Gates

Clinics & Chambers


Warehouse Wickets

05 DIMENSIONS

OUTDOOR STATION

Width	135 mm
Height	51 mm
Depth	34 mm

All dimensions in millimetres.



SIDE



34

MOUNTING
Surface
ENCLOSURE
Aluminium alloy
PROTECTION
IP65
COLOURS
Black / grey

06 TECHNICAL SPECIFICATIONS

CAMERA

Lens	3.2 mm wide-angle
Resolution	2.0 MP
Angle of view	148°
IR cut filter	Yes
Night vision	Infrared illumination
Video output	Switchable 1080P / 720P / CVBS

DOOR FUNCTIONS

Lock control	Compatible with a range of electronic locks
Exit button	Supported
Audio	Intercom with volume adjustment

POWER

Power source	From the indoor monitor over the 4-wire link (system adapter DC 12 V 2 A)
--------------	---

MECHANICAL & ENVIRONMENT

Wiring	4-wire
Dimensions	135 × 51 × 34 mm
Mounting	Surface
Colour options	Black / grey
Enclosure material	Aluminium alloy
Protection rating	IP65
Operating temperature	-40 °C to +50 °C

SUPPLIED ACCESSORIES

In the box	Rain cover, 35° deviator
------------	--------------------------

COMPLIANCE

Certification	CE, FCC, RoHS
---------------	---------------

Specifications subject to change without notice.

07 IN THE BOX & RELATED MODELS

NX-VD570-W outdoor door station

Rain cover

35° mounting deviator

Mounting plate and screw pack

Quick start guide

NX-VD570-W-MN
7-Inch Indoor Monitor

NX-VD570-W-CS
Video Door Phone Kit

NX-VD770-FMW
Outdoor Door Station with Fingerprint, Card and PIN

08 WARRANTY, SUPPORT & ORDERING

Exclusive Distributor

DigiMark Solution is the exclusive Nexakey distributor for Bangladesh. Warranty is registered and serviced locally — no overseas RMA.

Nationwide Service

Service and spare-part support through branches in Dhaka, Chattogram and the divisional offices.

Installation & Commissioning

Site survey, cabling advice and commissioning by trained engineers, with handover training for the household or facilities team.

Spare Parts Held Locally

Fast-moving parts stocked in Dhaka so a dead door station is replaced in days, not months.

MODEL	DESCRIPTION	AVAILABILITY
NX-VD570-W	Outdoor Door Station	Indent Order
NX-VD570-W-MN	7-Inch Indoor Monitor	Indent Order
NX-VD570-W-CS	Video Door Phone Kit	Indent Order
NX-VD770-FMW	Outdoor Door Station with Fingerprint, Card and PIN	Indent Order

Availability indicative. Confirm lead time and warranty terms with your exclusive Nexakey distributor at order. Prices on request.